


A New and Unique Flooring System







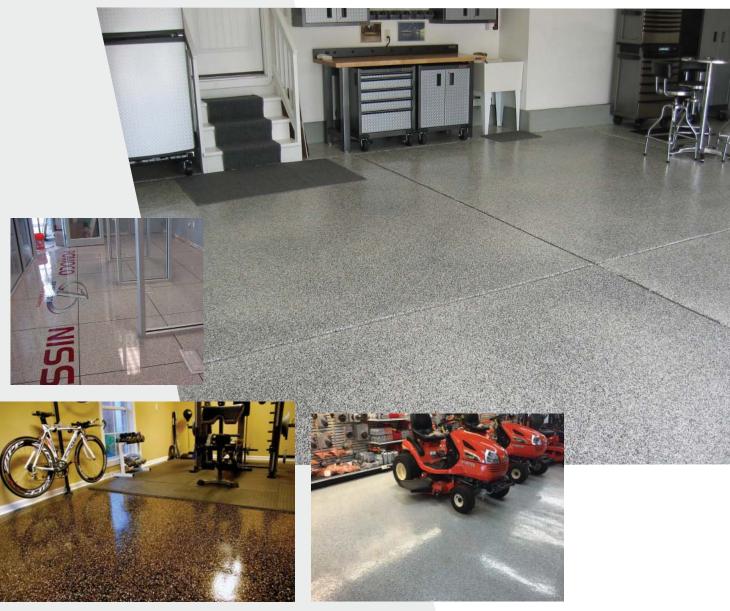

Durafleck 5000

The CTi Durafleck 5000 finish provides a beautiful, durable, granite-like finish that is perfect for many areas around the home. Garage Floors, Basements, workshops, even countertops spring to life with the Durafleck 5000 System.

The Durafleck 5000 System is a state-of-the-art concrete coating that offers a stain resistant, easy to clean surface. Tougher than concrete, the Durafleck System resists wear and tear and wipes clean with a damp sponge or mop. It is the perfect surface for all high traffic, heavy use areas.

Recommended Uses

Residential Garages Workshops Basements

Commercial

Hospitals
Convenience Stores
Schools
Auto Showrooms
Grocery Stores
Airports
Convention Centers
Restaurants

Technical Information (sealed with Pro Seal 200)

Tensile Strength 6500 psi 100% modulus 5200 psi Elongation 200% Sward Hardness 50 1/4" Mandrel bend **Pass** Direct impact >160 Reverse impact >160 MEK 100 double rubs No effect Toluene, spot test No effect Gasoline, spot test No effect IN KOH, spot test No effect Glacetic acetic acid No effect

YOUR AUTHORIZED DEALER

Colors are matched as closely as possible to our standards. Colors may be affected by age, light and texture.

The color selector is designed to assist you in making your selection for CTi's Reflective Flooring Additive colors. CTi's Reflective Flooring additive colors are measured by weight (not volume) and are designed to be added to 100% solids epoxy. 1-4 pigment packs should be added per gallon of epoxy base, depending on the look desired. Mix thoroughly for 3 minutes to insure proper dispersion. CTi's Reflective Flooring may be used in other clear vehicles such as polyurethane, acrylic sealers and waterborne epoxies all with different effects.

To ensure proper color, the entire contents of the CTi's Reflective Flooring Additive should be used. Be sure to thoroughly read all application data on whatever vehicle you are adding the CTi's Reflective Flooring Additive to. Due to reproduction limitations, it is necessary that we reserve the right to allow for reasonable variations of application. Printed colors show approximate color without effect of dispersing techniques, finishing techniques or application procedure. Variation of application will also affect the final appearance



Concrete Technology Inc.

8770 133rd Ave. N., Largo, FL 33773 Phone: 800.447.6573 • 727.535.4651 • Fax: 727.536.8273

www.designcti.com

facebook: www.facebook.com/CommunityCTi